


Technical drawings

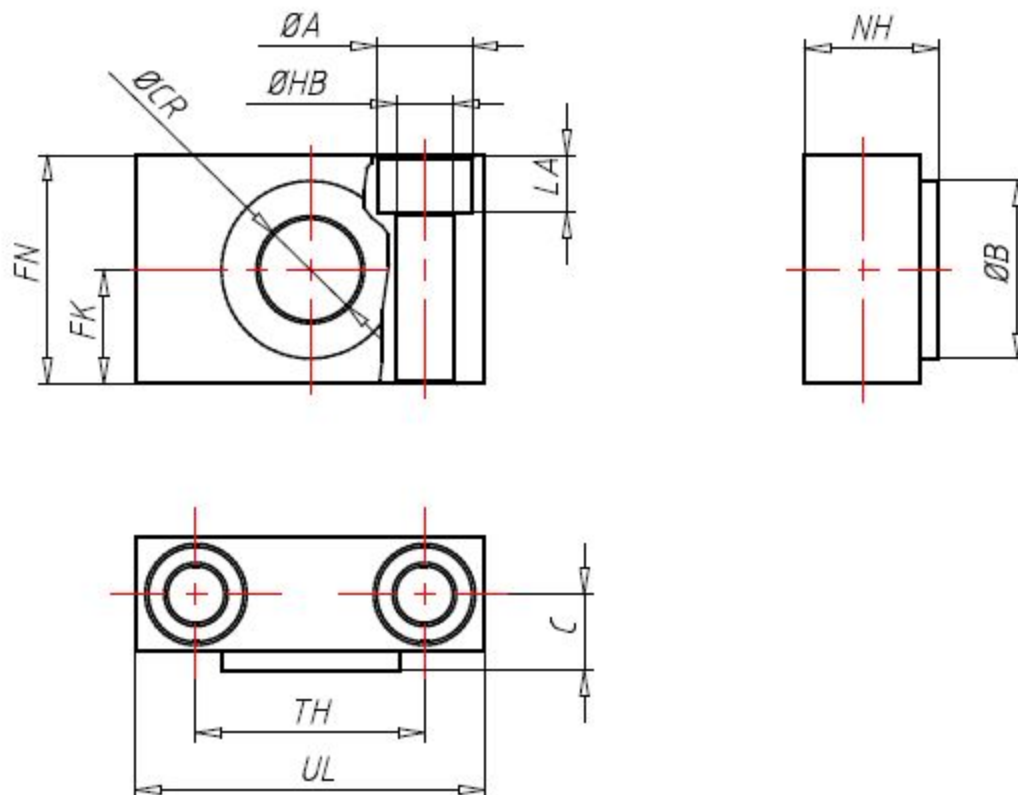

PCG (Packaging)	s - single packaging
DI ($\varnothing$ / mm)	40-50
CR ($\varnothing CR$ / mm)	16
FN (FN / mm)	36
FK (FK / mm)	18
HB ($\varnothing HB$ / mm)	9
A ($\varnothing A$ / mm)	15
LA (LA / mm)	9
TH (TH / mm)	36
C (C / mm)	12
UL (UL / mm)	55
NH (NH / mm)	21
B ($\varnothing B$ / mm)	28