

Mini safety valves

Adjustable 0.5 - 60 bar

pneuparts
.com

Brass

TECHNICAL FEATURES

Materials:

Brass

** Optional: Stainless steel 303, (1.4305)*

Temperature range:

-10°C to +180°C

Media:

Compressed air and other non-toxic, non-flammable gases, vent freely


Seal:

Standard viton seal

** Optional: EPDM, NBR or Silicone*



ARTICLE NUMBER	Thread	Reaction pressure (Bar)	Blow-off capacity (m3 / hour)	C	D	SW
AMSV181	G 1/8"	0.5 - 1	to 50	27	7	16
AMSV184	G 1/8"	1 - 4	to 200	27	7	16
AMSV187	G 1/8"	3 - 7	to 350	27	7	16
AMSV1812	G 1/8"	6 - 12	to 650	27	7	16
AMSV1818	G 1/8"	10 - 18	to 870	27	7	16
AMSV1832	G 1/8"	16 - 32	to 1600	27	7	16
AMSV1860	G 1/8"	30 - 60	to 3000	27	7	16
AMSV141	G 1/4"	0.5 - 1	to 50	27	7	16
AMSV144	G 1/4"	1 - 4	to 200	27	7	16
AMSV147	G 1/4"	3 - 7	to 350	27	7	16
AMSV1412	G 1/4"	6 - 12	to 650	27	7	16
AMSV1418	G 1/4"	10 - 18	to 870	27	7	16
AMSV1432	G 1/4"	16 - 32	to 1600	27	7	16
AMSV1460	G 1/4"	30 - 60	to 3000	27	7	16

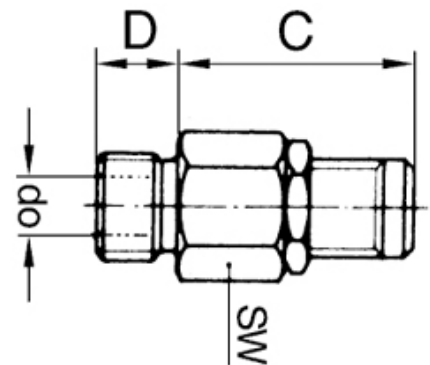

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
The Netherlands

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com