




Specification

| | | |
|--------------------------|-------------------------------|---|
| Bore No. | 6A | |
| Port size | Rc1/8 | |
| No. of port | 2 | 3 |
| No. of position | 2 | |
| Medium | Air | |
| Operating pressure range | 0.01~0.7 MPa | |
| Proof pressure | 1 MPa | |
| Effective orifice | 0.8 mm ² | |
| Response time | 20 ms | |
| Ambient temperature | -5~+50°C (No freezing) | |
| Voltage | AC110V, 220V (50/60)Hz, DC24V | |
| Power consumption | AC=4.8/4.4VA, 6/4.9VA, DC=2W | |
| Available voltage range | ±10% | |
| Insulation class | F class | |
| Weight | 155 g | |

Flow features

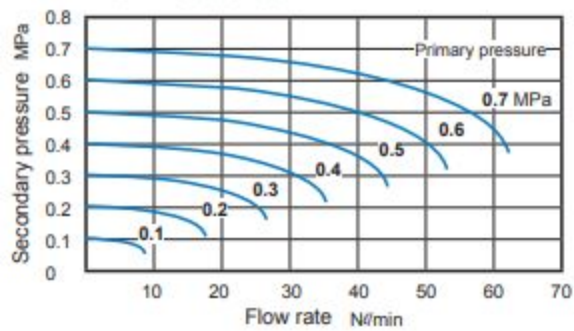

SVDO

