

Speed control valve

with check valve

pneuparts
.com

Push to lock

TECHNICAL FEATURES

Temperature:

-20°C to 80°C


Working pressure:

0 to 10 bar

Materials:

Body: PA66 GR


Seals: NBR

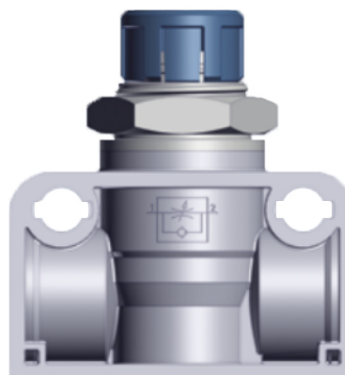


-20° C ÷ +80° C



0 ÷ 10 bar

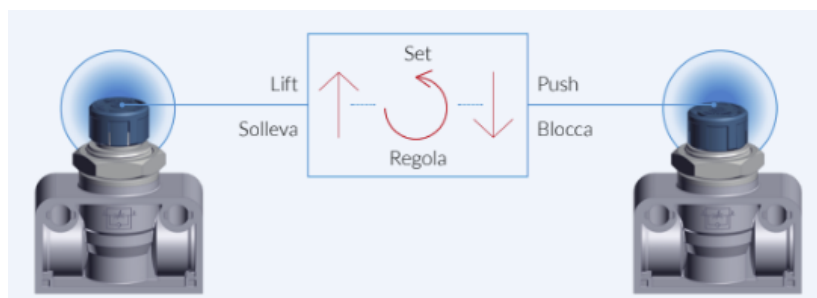

With check valve



** See the next page for the dimensions/ specifications*

Pneuparts.com

Florijn 10 b/c
5751 PC Deurne
The Netherlands

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com

SPECIFICATIONS

ARTICLE NUMBER	D1	D2	D3	L1	L2	L3	L4	L5	L6	S	CH
FCV18NRV	G 1/8"	4.3	M14x1	21.75	35.8 37.3	32.5	24	8	4.25	16	17
FCV14NRV	G 1/4"	6.5	M20x1	30	53.5 55	50	35	12	5.5	25	24
FCV38NRV	G 3/8"	6.5	M20x1	32.5	53.5 55	50	39	12	5.5	25	24
FCV12NRV	G 1/2"	6.5	M20x1	40	67.6 69.1	62	50	16.5	6	30	24

