

# T- Push-in coupling

## Male thread

Temperature range: -20°C to  
max. +70°C

Operating pressure: up to max.  
18 bar

Vacuum:  
-99


### PB

T-inschroefkoppeling

Swivelling tee fitting, parallel

Raccord à té tournant,  
mâle cylindrique

T-Verschraubung, schwenkbar und  
zylinderförmig

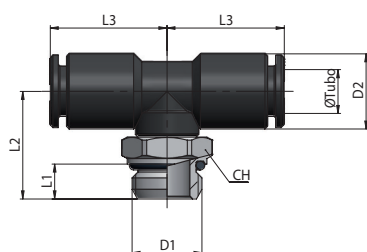

Type	Ø Tubo	D1	D2	L1	L2	L3	CH	g $\Delta$
PB04M5TL	4	M5x0,8	10	4	14,8	15,7	9	5,6
PB04G18TL	4	G1/8	10	5	15	15,7	13	8,1
PB04G14TL	4	G1/4	10	6,5	17	15,7	16	12
PB06M5TL	6	M5x0,8	12	4	15,3	20,2	12	9,2
PB06G18TL	6	G1/8	12	5	17,3	20,2	12	9,8
PB06G14TL	6	G1/4	12	6,5	19,3	20,2	15	13,6
PB08G18TL	8	G1/8	14	5	18	21,7	12	11,1
PB08G14TL	8	G1/4	14	6,5	20	21,7	15	15,1
PB08G38TL	8	G3/8	14	7	21,5	21,7	20	23,7
PB10G14TL	10	G1/4	16	6,5	21,5	24	16	18
PB10G38TL	10	G3/8	16	7	23,5	24	20	25,2
PB12G38TL	12	G3/8	19	7	24	28,5	20	30,5
PB12G12TL	12	G1/2	19	8,5	28,5	28,5	20	38,1