

Flow regelventiel met draaibare Push-in fitting, afvoerlucht regelend

Flow control with swivelling push-in fitting, exhaust air flow controlling

Réducteur de débit avec raccord tournant, contrôle d'air d'évacuation

Drosselrückschlagventil mit schwenkbarer Steckverschraubung, abluftregelnd

POWFC





1	2	3	4	5
Behuizing Body Corps Körper	Naald Needle Epingle Nadel	Cartridge Cartridge Cartouche Patrone	Afdichting Seals Joint d'étanchéité Dichtung	banjo ring Banjo Ring Banjo Steckverschraubungen
Messing UNI EN 12164 CW614N Vernikkeld Brass UNI EN 12164 CW614N Nickel plated Laiton UNI EN 12164 CW614N Nickelé Messing UNI EN 12164 CW614N vernikkelt			NBR NBR NBR NBR	Push-in functie koppelingen Push-in function fittings Raccords instantanés série Funktion Steckverschraubungen

-20°C + 70°C

0 + 10 bar



P = 6 bar - Δp = 1 bar

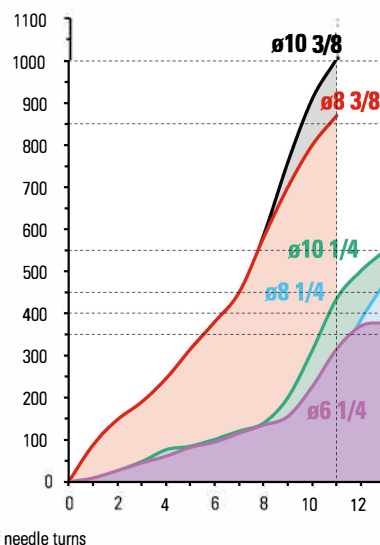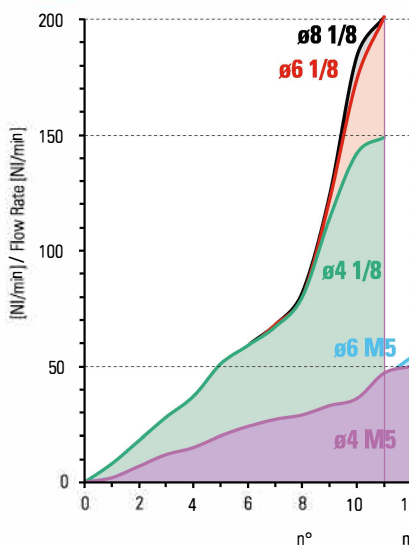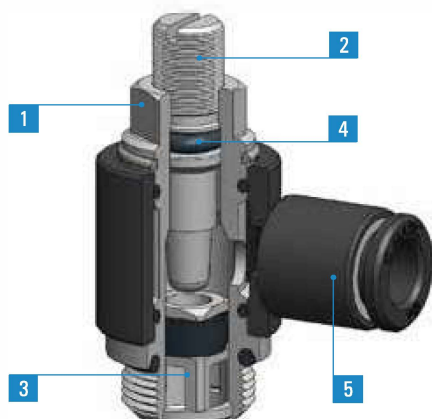

Type	Ø Tube	D1	D2	L1	L2	L3 max	L4	CH	g Δ
POWFCM504S	4	M5x0,8	9,7	4	12	25,5	17,6	6	8
POWFC1804S	4	G1/8	9,7	5,2	15,1	31,8	19,1	9	17
POWFCM506S	6	M5x0,8	12	4	11,5	25,5	21,5	6	9
POWFC1806S	6	G1/8	12	5,2	15,1	31,8	22,7	9	18
POWFC1406S	6	G1/4	12	6,4	17,4	39,5	24,3	10	31
POWFC1808S	8	G1/8	14	5,2	14,9	31,8	23	9	20
POWFC1408S	8	G1/4	14	6,4	17,4	39,5	24,6	10	32
POWFC3808S	8	G3/8	14	7	20	50	26,5	14	59
POWFC1408S	10	G1/4	16	6,4	17,4	39,5	27	10	33
POWFC3810S	10	G3/8	16 7		20	50	28,5	14	60

Disponibile nelle versioni: Available as:

exhaust air flow controlling



De banjo ring draaikoppelingen veranderen ook de flow control installatie.
The banjo ring swivels also after flow control installation.
Les banjos peuvent être orientés après l'installation du réducteur.

Der Schwenkring kann nach der Montage des Drosselrückschlagventiles noch orientiert werden.

DATA BLAD

Aanbevolen verbindingspijpen
PA 11, PA 12, PA 6, Polyurethaan
PU (98 Aandeel AI)

Toepassingsgebieden:
pneumatische systemen voorzien van
gefilterde en gesmeerde lucht.

DATA SHEET

Recommended tubings:
PA11, PA12, PA6, Polyurethane PU
(98 Shore A)

Application field:
pneumatic installations fed with filtered,
lubricated air.

REINSEIGNEMENTS TECHNIQUES

Tube conseillé:
PA11, PA12, PA6, Polyurethane PU
(98 Shore A).

Domaines d'application:
circuits pneumatiques avec air filtré
et lubrifié.

TECHNISCHE AUSKÜNFTE

Empfohlene Schläuche:
PA11, PA12, PA6, Polyurethan PU
(98 Shore A).

Anwendungsbereiche:
pneumatische Anlage mit gefilterter und
geölter Druckluft.