Pressure switch

MDR 3

With diaphragms for compressors

Fixed pressure difference of approximately between minimum and maximum pressure. When the pressure switch is set to 10 bar release pressure, it will strike again at around 8 bar. The pressure regulator with 4 outlets, is ideal to include. pressure gauge, pressure regulator, safety valve to be connected

Rated insulation voltage
690 V

Motor switching capacity
5.5 kW

Bursting strength
> 35 bar

Permissible medium temperature
- 5...+ 80 ÁC

Permissible medium temperature water
+ 80 ÁC

Air, water
Resistant

Switch type
Rotary switch or no switch

Setting range
Between 1.3 - 6 and 12 - 35

Pressure connection
3 x G1/4" or none

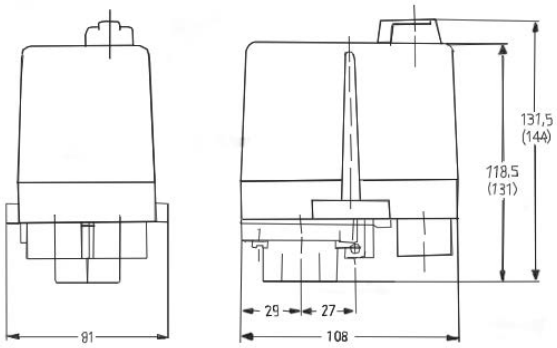

- *3-phase*
- *Switching capacity 7.5 (11) kW / 20 HP*
- *Available with overload relay*
- *Max. cut-out pressure 35 bar*
- *3-pole (N.C.)*

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com

BTW: NL8209.12.931B01
KvK: 17126382
Swift: RABONL24
IBAN: NL23RABO01036.31240