


Stainless Steel Cylinders - ISO 15552

Through rod

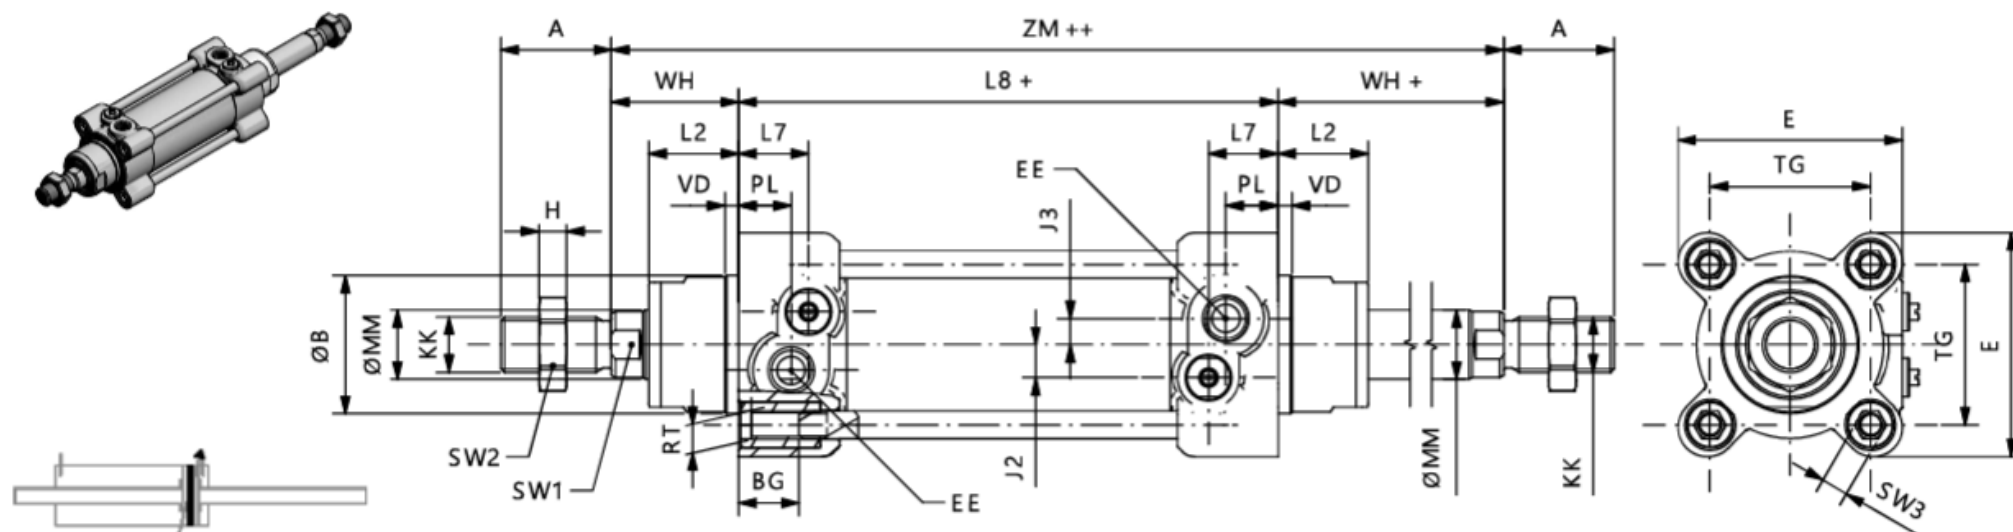

Ø	ØMM	KK	A	ØB	VD	VA	L2	RT	BG	J2	J3	H	SW2	TG	EE	PL	WH	L8	E	SW1	SW3	L7	ZM
32	12	M10x1,25	22	30	4	4	20	M6	15	6	5	6	17	32,5	1/8G	10	26	94	47	10	6	17,5	146
40	16	M12x1,25	24	35	4	4	22	M6	15	7,5	5	7	19	38	1/4G	15	30	105	52	13	8	21,5	165
50	20	M16x1,5	32	40	4	4	26	M8	16	9,5	7,5	8	24	46,5	1/4G	15	37	106	65	17	8	20	180
63	20	M16x1,5	32	45	4	4	25	M8	16	13,5	4	8	24	56,5	3/8G	16	37	121	75	17	8	20	195
80	25	M20x1,5	40	45	4	4	32	M10	17	13,5	6	9	30	72	3/8G	20	46	128	95	22	10	27	220
100	25	M20x1,5	40	55	4	4	38	M10	17	15	6	9	30	89	1/2G	23,5	51	138	115	22	10	28,5	240
125	32	M27x2	54	60	5	5	40	M12	21	17	8	12	41	110	1/2G	23,5	65	160	140	27	12	31,5	290
160	40	M36x2	72	65	8	6	50	M16	23	17	15	14	55	140	3/4G	27,5	80	180	180	36	-	33	340
200	40	M36x2	72	75	8	8	65	M16	23	17	15	14	55	175	3/4G	27	95	180		36	-	35	370

+ Stroke length

Pneuparts.com

Florijn 10 b/c 5751 PC
Deurne Netherlands

+31 (0)493 763 99
info@pneuparts.com
www.pneuparts.com