

Vacuum valves

3/2 way

G 1/4" - G 3/8"

- Patented conical shutter system and shaped PU membrane.
- Version with external pneumatic actuation.
- Extreme flexibility suitable for operation with vacuum and compressed air.
- Robust construction and low weight.
- NC and NO version
- Available with plastic end caps



Max vacuum

755 mmHg

Compressed air

max 10 bar

Ambient temperature

-20 + 50


Tension

24VDC 11W standard


* Option: 12VDC 24VAC 110VAC 220VAC

Properties

Fluid	Filtered compressed air, with or without lubrication - vacuum
Ambient temp.	-20 to +50°C
Fluid temp.	Max 50°C
Max. vacuum	755 mmHg
Pressure	max 10 bar
Function	3/2 NC 3/2 NO
Control	Pneumatic Indirect Electric
Return	Mechanical and pneumatic spring
Manual control	Screw, 2 positions
Connection	G 1/4" - G 3/8"
Electric operator	10
Mounting position	Preferable

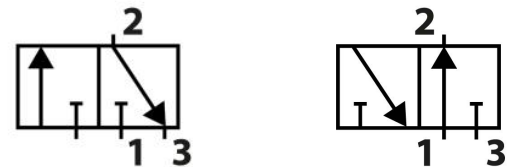

DRAWINGS

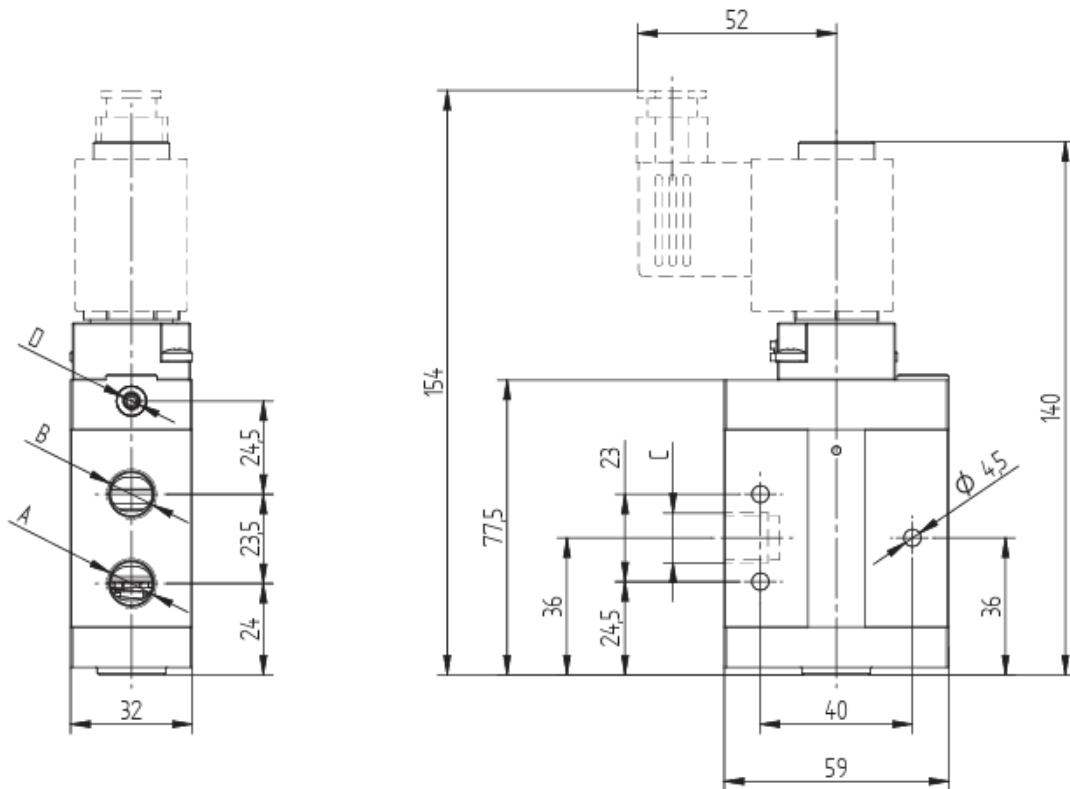

PNEUMATIC SYMBOLS			SIZE		
	NA	NC	connection	plastic found.	Aluminium Found
A	3	1	G 1/4" G3/8"		
B	1	3	G 1/4" G3/8"		
C	2	2	G 1/4" G3/8"		
D	12	12		M5	G 1/8"