

Compact cylinder - UNITOP

Double acting


UNITOP -


Materials:

Head and foot: Anodized aluminum,

Cylinder tube: Anodized aluminum,

Piston rod: 1.4305, seal: Polyurethane

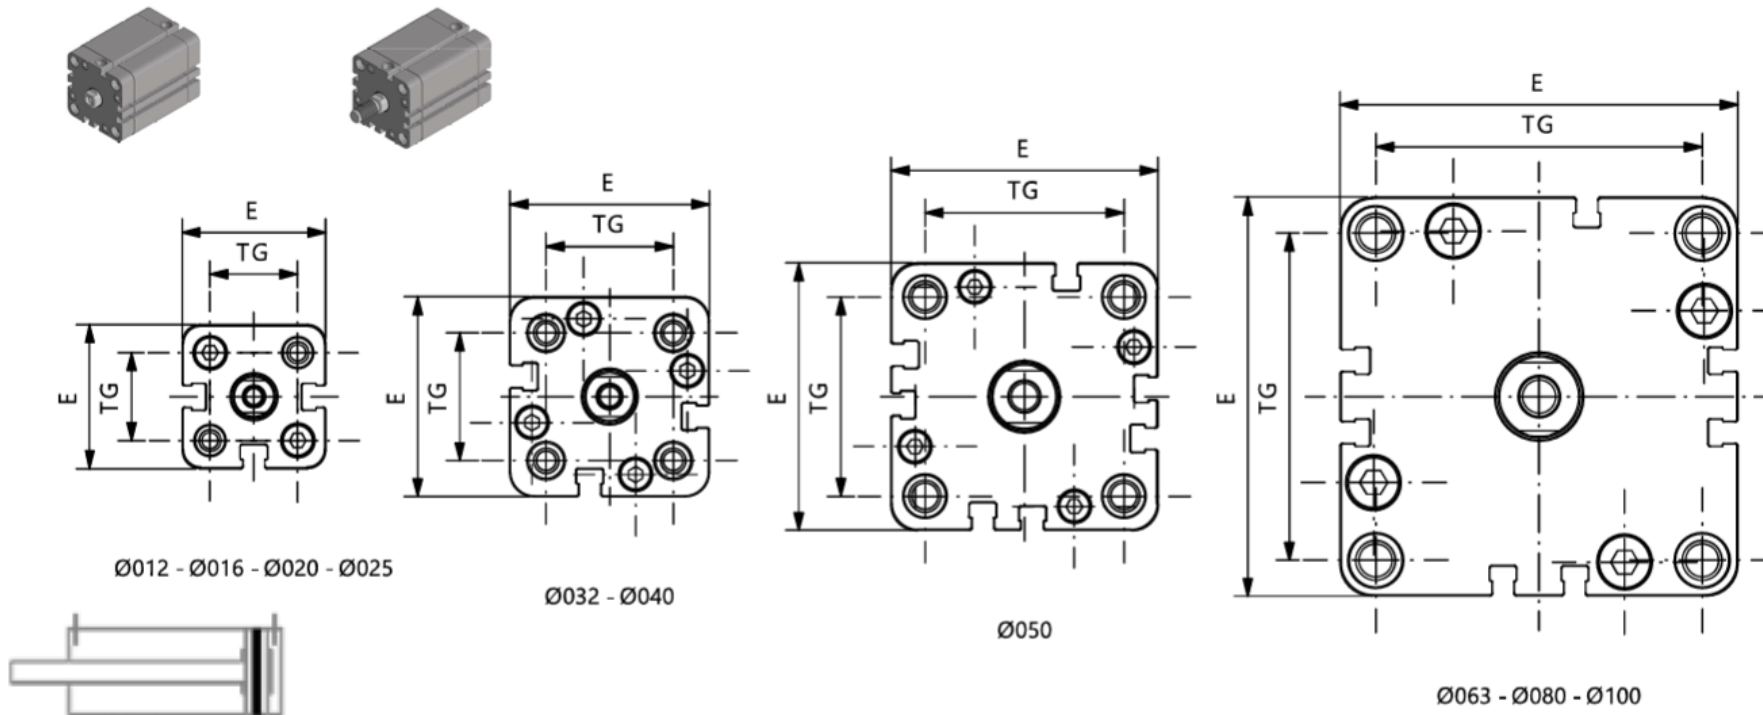

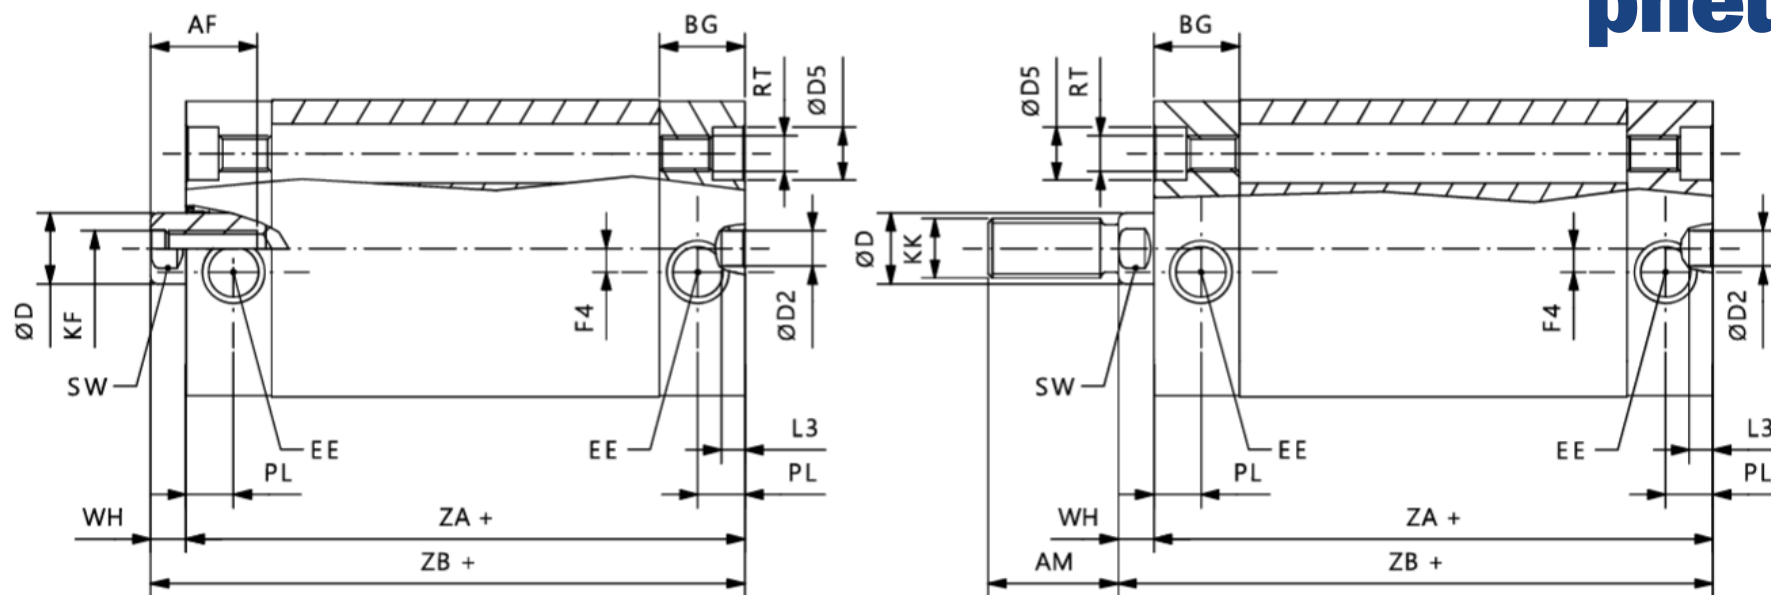

Ø	E	ØD2	RT	ØD5	KF	ØD	EE	PL	BG	TG	SW	L3	AF	WH	ZA	AM	KK	ZN	F4
12	29	6	M4	6	M3	6	M5	8	12,25	18	5	4	8	4,5	38	16	M6x1	42,5	-
16	29	6	M4	6	M4	8	M5	8	12,25	18	6	4	11	4,5	38	20	M8x1	42,5	-
20	36	8	M5	7,5	M5	10	M5	8	12,25	22	8	4	12	4,5	38	22	M10x1,25	42,5	-
25	40	6	M5	7,5	M5	10	M5	8	12,75	26	8	4	12	5,5	39,5	22	M10x1,25	45	-
32	50	8	M6	9	M6	12	1/8 G	8	14,5	32	10	4	15	6	44,5	22	M10x1,25	50,5	4
40	58	8	M6	9	M6	12	1/8 G	8	14,75	42	10	4	15	6,5	45,5	22	M10x1,25	51	3
50	67	6	M8	10,5	M8	16	1/8 G	8	14,75	50	13	4	17	7,5	45,5	24	M12x1,25	53	-
63	80	8	M10	13,5	M8	16	1/8 G	8	14,25	62	13	4	17	7,5	50	24	M12x1,25	57,5	-
80	100	8	M10	13,5	M10	20	1/8 G	8,5	16	82	17	4	17	8	56	32	M16x1,5	64	-
100	124	8	M10	13,5	M12	25	1/4 G	10,5	19,25	103	22	4	22	10	66,5	40	M20x1,5	76,5	-

+ Stroke length

Pneuparts.com

Florijn 10 b/c 5751 PC
Deurne Netherlands

+31 (0)493 763 99
info@pneuparts.com
www.pneuparts.com