

Coil

For indirect acting solenoid valves

22 mm

ITEM DESCRIPTION

Function:

22 mm Encapsulated coil

Material:

Class F: Fiber-Glass reinforced Nylon

Class H: Fiber-Glass reinforced Polyester

Magnetic circuit: Zinc-plated steel

Windings: Class H insulated copper wires

Ambient Temperature:

Class F: -10°C +55°C

Class H: -10°C +80°C

Electric connection:

According to DIN 43650 B

Options:

Special powers on request

Special voltages on request




ARTICLE SPECIFICATIONS

ARTICLE NUMBER	SIZE COIL	ARMATURE TUBE	VOLTAGE	POWER	OPERATES ON
COIL2210230AC	22 mm	10 mm	230AC	11.5 VA	solenoid valves indirect acting
COIL2210110AC			110AC	11.5 VA	
COIL221024AC			24 AC	11.5 VA	
COIL221024DC			24DC	7W	
COIL221012DC			12DC	7W	

DIMENSIONS AND DRAWINGS:

Serie 2800

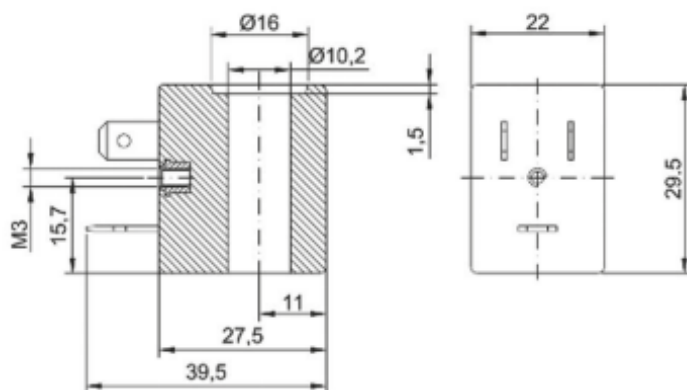

Serie 2200

