

Elbow push-in coupling, extended

Tapered thread

Temperature range: -20°C to
max. +70°C

Operating pressure: up to max.
18 bar

Vacuum:
-99


PLL

Verlengde draaibare knie
inschroefkoppeling, conische draad

Extended swivel elbow, taper

Raccord à coude long,
mâle tournant conique

Verlängerte Winkelschwenkverschraubung,
kegelig

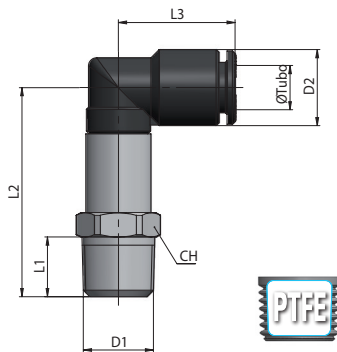

Type	Ø Tub	D1	D2	L1	L2	L3	CH	g _Δ
PLL04C18TL	4	R1/8	10	7,5	26	15,5	10	10
PLL04C14TL	4	R1/4	10	11	30	15,5	14	16,1
PLL06C18TL	6	R1/8	12	7,5	33,3	20	12	17,6
PLL06C14TL	6	R1/4	12	11	37,8	20	14	20,5
PLL08C18TL	8	R1/8	14	7,5	34	21,5	12	18
PLL08C14TL	8	R1/4	14	11	38,5	21,5	14	20,8
PLL08C38TL	8	R3/8	14	11,5	39	21,5	17	27,4
PLL10C14TL	10	R1/4	16	11	41,9	24	16	36,4
PLL10C38TL	10	R3/8	16	11,5	42,9	24	17	35,1