

Pressure regulator

pneuparts
.com

Up to 25000 l/min

Self-relieving pressure regulator, PN 40

Version:

Self-relieving pressure regulator

Materials:

Body: brass (DR 8740 and DR 8840: gravity die cast aluminium),
diaphragms and seals: NBR

Temperature range:

-10°C bis +90°C

Input pressure:

max. 40 bar

Pressure gauge connection:

G 1/4"

Switch panel thread:


DR 1140: M 20 x 1,5, DR 3340: M 28 x 1,5

Media:

Oiled and unoled compressed air, neutral gasses

Scope of delivery:

Pressure regulator incl. 50 mm pressure gauge

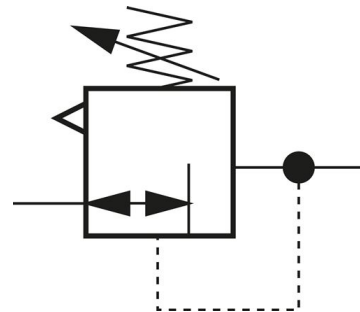

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com

BTW: NL8209.12.931B01
KvK: 17126382
Swift: RABONL24
IBAN: NL23RABO01036.31240

HOW TO ORDER: Click on the article numbers to order

G 1 1/2" Thread, Flow: 25000 l/min, Brass MS, 40 PN

Article nr.	Pressure regulation area	Pressure gauge display	Version
HPR87406G	0.5 - 6 bar	0 - 10 bar	Standard
HPR8740G	0.5 - 10 bar	0 - 16 bar	Standard
HPR87416G	0.5 - 16 bar	0 - 25 bar	Standard
HPR87425G6G	0.5 - 25 bar	0 - 40 bar	Standard

G 1 1/2" Thread, Flow: 25000 l/min, Brass MS, 40 PN

Article nr.	Pressure regulation area	Pressure gauge display	Version
HPR87406SO	0.5 - 6 bar	0 - 10 bar	Lockable
HPR8740SO	0.5 - 10 bar	0 - 16 bar	Lockable
HPR874016SO	0.5 - 16 bar	0 - 25 bar	Lockable
HPR874025SO	0.5 - 25 bar	0 - 40 bar	Lockable

G 2" Thread, Flow: 25000 l/min, Brass MS, 40 PN

Article nr.	Pressure regulation area	Pressure gauge display	Version
HPE88406G	0.5 - 6 bar	0 - 10 bar	Standard
HPR8840G	0.5 - 10 bar	0 - 16 bar	Standard
HPE884016G	0.5 - 16 bar	0 - 25 bar	Standard
HPR884025G	0.5 - 25 bar	0 - 40 bar	Standard

G 2" Thread, Flow: 25000 l/min, Brass MS, 40 PN

Article nr.	Pressure regulation area	Pressure gauge display	Version
HPR88406SO	0.5 - 6 bar	0 - 10 bar	Lockable
HPR884010SO	0.5 - 10 bar	0 - 16 bar	Lockable
HPR884016SO	0.5 - 16 bar	0 - 25 bar	Lockable
HPR884025SO	0.5 - 25 bar	0 - 40 bar	Lockable