


Round cylinder double acting - ISO 6432

RVS

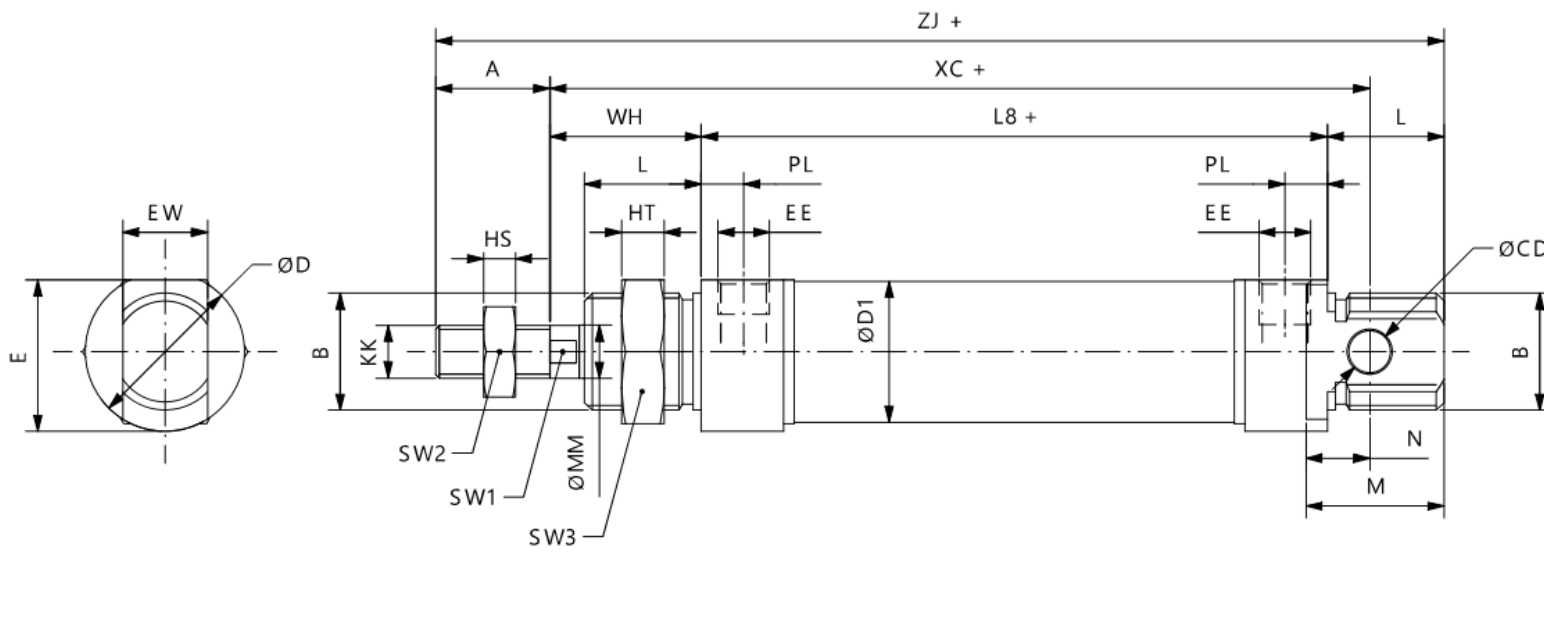

$\varnothing$	B	KK	SW1	A	WH	$\varnothing MM$	L	HS	HT	SW2	SW3	M	PL	EE	$\varnothing D1$	L8	XC	ZJ	N	$\varnothing CD$	EW	$\varnothing D$	E
16	M16x1,5	M6x1	5	16	22	6	18	4	5	10	22	20	4,5	M5	17,27	53	82	109	9	6	12	19	18
20	M22x1,5	M8x1,25	7	20	24	8	20	5	8	13	27	28	8	1/8 G	21,27	67	95	131	12	8	16	27	25,5
25	M22x1,5	M10x1,25	9	22	28	10	22	6	8	17	27	26	8	1/8 G	26,5	68	104	140	12	8	16	30	28,5

+ = stroke length

Pneuparts.com

Florijn 10 b/c
5751 PC
Deurne
Netherlands

+31 (0)493 763 99
info@pneuparts.com
www.pneuparts.com