

Vacuum valves

3/2 way

G 1/2" - G 2"

- Patented conical shutter system and shaped PU membrane.
- Version with external pneumatic actuation.
- Extreme flexibility suitable for operation with vacuum and compressed air.
- Robust construction and low weight.
- NC and NO version
- Available with aluminum end caps





Max vacuum

755 mmHg

Compressed air

max 10 bar



Ambient temperature

-20 + 50

Tension

24VDC 11W standard

* Option: 12VDC 24VAC 110VAC 220VAC

Properties


Fluid	Filtered compressed air, with or without lubrication - vacuum
Ambient temp.	-20 to +50°C
Fluid temp.	Max 50°C
Max. vacuum	755 mmHg
Pressure	max 10 bar
Function	3/2 NC 3/2 NO
Control	Pneumatic Indirect Electric
Return	Mechanical and pneumatic spring
Manual control	Screw, 2 positions
Connection	G 1/2" - G 2"
Electric operator	13
Mounting position	Preferable

Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
Nederland

Phone: +31 (0)493 763 993
info@pneuparts.com
www.pneuparts.com


BTW: NL8209.12.931B01
KvK: 17126382
Swift: RABONL24
IBAN: NL23RABO01036.31240

G 1/2" - G 3/4"

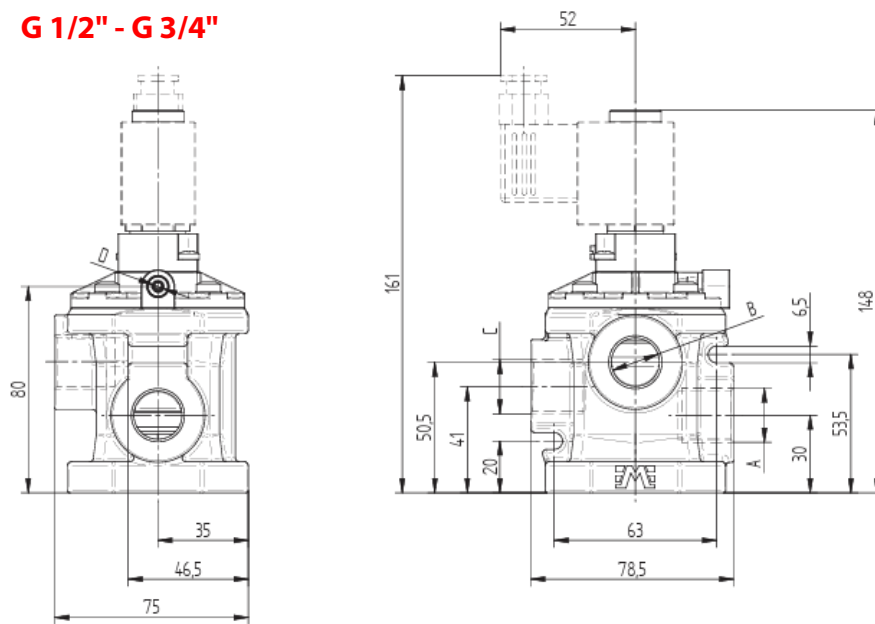


PNEUMATIC SYMBOLS			SIZE		
	NA	NC	connection	plastic found.	Aluminium Found
A	1	1	G 1/2" G3/4"		
B	3	3	G 1/2" G3/4"		
C	2	2	G 1/2" G3/4"		
D	12	12		G 1/8"	G 1/8"

G 1"

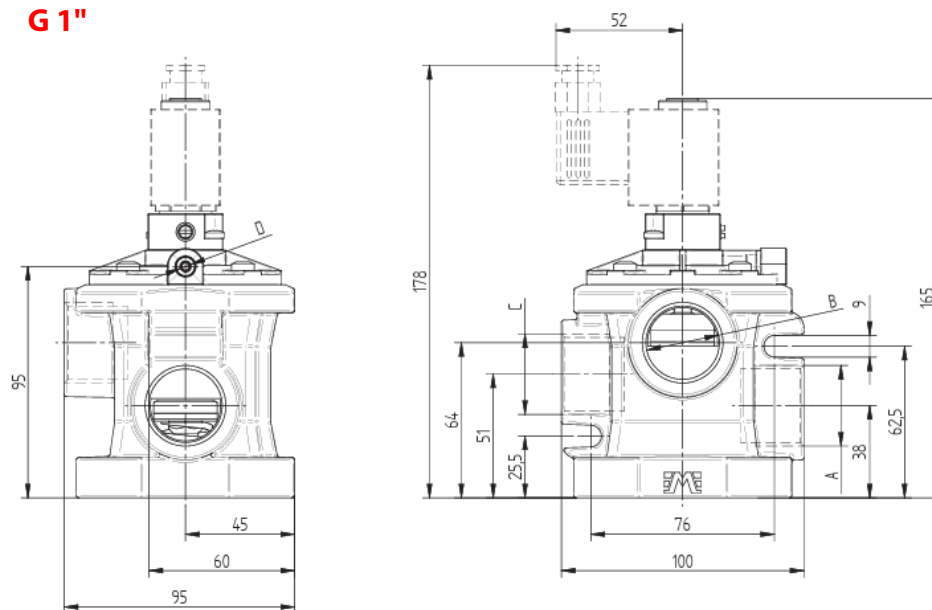


PNEUMATIC SYMBOLS			SIZE		
	NA	NC	connection	plastic found.	Aluminium Found
A	1	1	G 1"		
B	3	3	G 1"		
C	2	2	G 1"		
D	12	12		G 1/8"	G 1/8"

G 1 1/2"

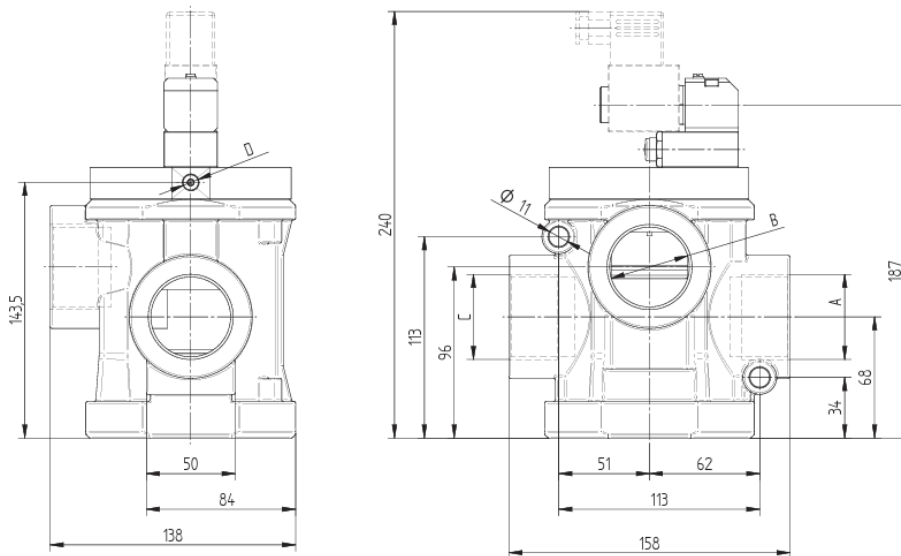

PNEUMATIC SYMBOLS			SIZE		
	NA	NC	connection	plastic found.	Aluminium Found
A	3	1	G 1 1/2"		
B	1	3	G 1 1/2"		
C	2	2	G 1 1/2"		
D	12	12			G 1/8"

G 2"

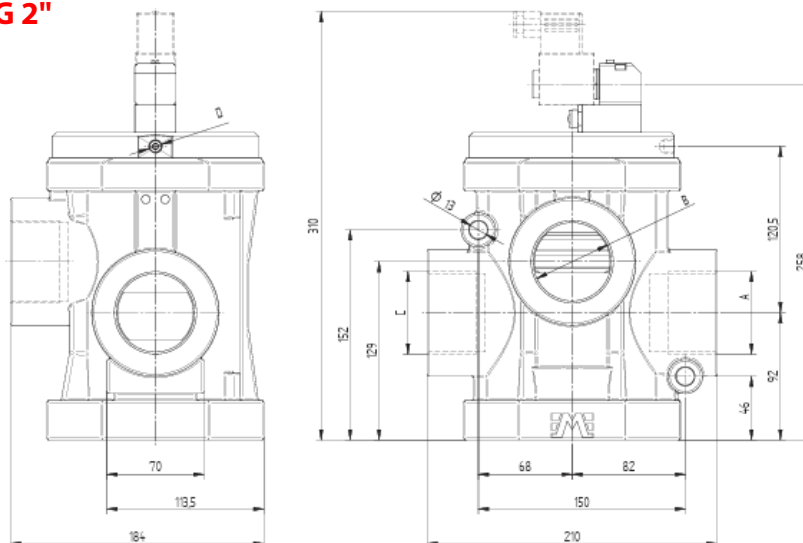

PNEUMATIC SYMBOLS			SIZE		
	NA	NC	connection	plastic found.	Aluminium Found
A	3	1	G 2"		
B	1	3	G 2"		
C	2	2	G 2"		
D	12	12			G 1/8"