

Whisker valves


3/2-way & 5/2-way Standard

Article code	Thread	Flow rate	Function	Workload	Operating force (N)
SPV5218	G 1/8"	550 l/min	5/2	2.5 - 10	0.6 N
SPV3218	G 1/8"	550 l/min	3/2 NC	2.5 - 10	0.6 N

Temperature range:
-10°C to +60°C

Media:
Oiled and unoled filtered compressed air

SPV5218

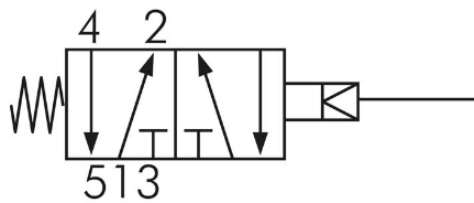

SPV32198

