

Hydraulic couplings

with female thread, ISO 7241-1 B

pneuparts
.com

Stainless steel

TECHNICAL FEATURES

Materials:

Body: 1.4404, spring: 1.4404

Seal: O-ring: FKM


Support ring: PTFE

Temperature range:

-25°C to +200°C

Optional:

NPT thread -NPT

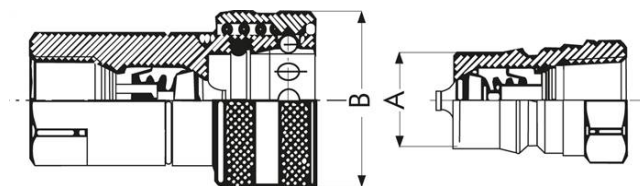

Hydraulic coupling

ARTICLE NUMBER	THREAD	A mm	B mm	PN bar	DN l/min.
HC18SS	G 1/8"	10.9	23	300	5
HC14SS	G 1/4"	14.2	28	300	6.3
HC38SS	G 3/8"	19.1	35	250	10
HC12SS	G 1/2"	23.5	44	250	12.5
HC34SS	G 3/4"	31.4	52	250	20
HC10SS	G 1"	37.8	60	200	25
HC114SS	G 1 1/4"	44.5	75	110	40
HC112SS	G 1 1/2"	44.5	75	110	40
HC20SS	G 2"	63.2	105	90	50

Hydraulic plug-in nipple

ARTICLE NUMBER	THREAD	A mm	B mm	PN bar	DN l/min.
HPN18SS	G 1/8"	10.9	23	400	5
HPN14SS	G 1/4"	14.2	28	300	6.3
HPN38SS	G 3/8"	19.1	35	250	10
HPN12SS	G 1/2"	23.5	44	250	12.5
HPN34SS	G 3/4"	31.4	52	250	20
HPN10SS	G 1"	37.8	60	225	25
HPN114SS	G 1 1/4"	44.5	75	120	40
HPN112SS	G 1 1/2"	44.5	75	120	40
HPN20SS	G 2"	63.2	105	100	50



Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
The Netherlands

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com