

T Push-in coupling

Tapered thread

Temperature range: -20°C to
max. +70°C

Operating pressure: up to max.
18 bar

Vacuum:
-99


PD

Zij- inschroef T-koppeling
conische draad

Lateral run tee fitting, taper

Raccord à té latéral
conique, tournant

T-Schwenkverschraubung, kegelig

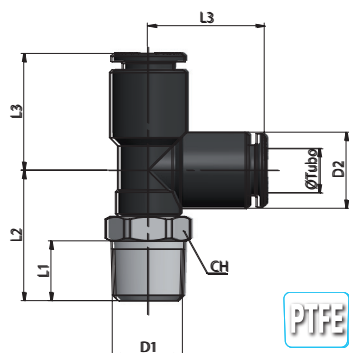

Type	Ø Tubo	D1	D2	L1	L2	L3	CH	g _Δ
PD04C18TL	4	R1/8	10	7,5	17	15,5	10	7,4
PD04C14TL	4	R1/4	10	11	20,5	15,5	14	12,6
PD06C18TL	6	R1/8	12	7,5	18,8	20	12	10,1
PD06C14TL	6	R1/4	12	11	23,3	20	14	15,2
PD08C18TL	8	R1/8	14	7,5	19,5	21,5	12	10,9
PD08C14TL	8	R1/4	14	11	24	21,5	14	16,2
PD08C38TL	8	R3/8	14	11,5	24,5	21,5	17	23,7
PD10C14TL	10	R1/4	16	11	25,5	24	16	22,5
PD10C38TL	10	R3/8	16	11,5	26,5	24	17	26,7