

Hydraulic couplings

with female thread, ISO 7241-1 B

pneuparts
.com

Galvanized steel

TECHNICAL FEATURES

Materials:


Body: zinc plated steel, seal: O-ring: NBR, support ring: PTFE

Temperature range:

-25°C to +120°C

Optional:

NPT thread -NPT, plug with pressure eliminator (can be coupled, even if dynamic pressure has built up on the plug side in the uncoupled state, due to e.g. solar irradiation) -DE

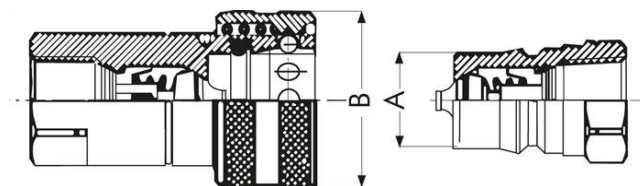

Hydraulic coupling

ARTICLE NUMBER	THREAD	A mm	B mm	PN bar	DN l/min.
HC18ST	G 1/8"	10.9	23	400	5
HC14ST	G 1/4"	14.2	28	350	6.3
HC38ST	G 3/8"	19	35	325	10
HC12ST	G 1/2"	23.5	44	250	12.5
HC34ST	G 3/4"	31.4	52	250	20
HC10ST	G 1"	37.8	60	225	25
HC114ST	G 1 1/4"	44.5	75	120	40
HC112ST	G 1 1/2"	44.5	75	120	40
HC20ST	G 2"	63.2	105	100	50

Hydraulic plug-in nipple

ARTICLE NUMBER	THREAD	A mm	B mm	PN bar	DN l/min.
HPN18ST	G 1/8"	10.9	23	400	5
HPN14ST	G 1/4"	14.2	28	350	6.3
HPN38ST	G 3/8"	19	35	325	10
HPN12ST	G 1/2"	23.5	44	250	12.5
HPN34ST	G 3/4"	31.4	52	250	20
HPN10ST	G 1"	37.8	60	225	25
HPN114ST	G 1 1/4"	44.5	75	120	40
HPN112ST	G 1 1/2"	44.5	75	120	40
HPN20ST	G 2"	63.2	105	100	50



Pneuparts.com
Florijn 10 b/c
5751 PC Deurne
The Netherlands

Phone: +31 (0)493 763 993

info@pneuparts.com
www.pneuparts.com