

PA 12 - High pressure

RESIN FEATURES

- Polyamide 12 HL flexible tubing, light and heat stabilized
- Produced with raw materials designed to meet DIN 73378/74324 standards

WORKING PRESSURE

Safety factor 3:1

COLORS




STANDARD LENGTH

25 and 100 meters




Code	Hose/tube Ø	Roll length	Weight g/m	Bending radius mm	(23°C) Working pressure BAR
PA4X15HP25NA	4x2.5 mm	25 m	300	20	64
PA4X15HP100NA	4x2.5 mm	100 m	1200	20	64
PA4X15HP25BK	4x2.5 mm	25 m	300	20	64
PA4X15HP25BK	4x2.5 mm	100 m	1200	20	64
PA6X3HP25N	6x3 mm	25 m	625	20	93
PA6X3HP100N	6x3 mm	100 m	2500	20	93
PA6X3HP25BK	6x3 mm	25 m	625	20	93
PA6X3HP100BK	6x3 mm	100 m	2500	20	93
PA8X5HP25NA	8x5 mm	25 m	845	40	64
PA8X5HP100N	8x5 mm	100 m	3150	40	64
PA8X5HP25BK	8x5 mm	25 m	845	40	64
PA8X5HP100BK	8x5 mm	100 m	3150	40	64

APPLICATIONS

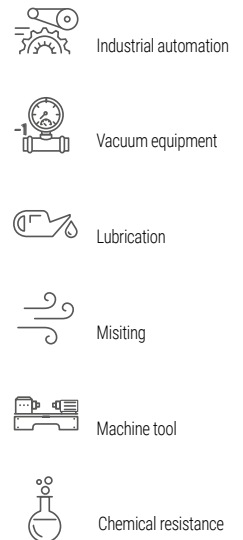

Technical features at a glance

* End of catalog reference

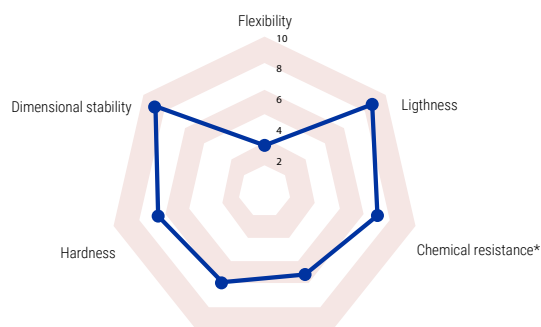

High temperature resistance

Low temperature resistance

Pressure values expressed as a % in relation to temperature

From -40°C to +80°C

