

Straight push-in coupling

Male thread

Temperature range:
-20°C to max. +80°C

Operating pressure:
up to max. 20 bar

Vacuum:
-99


PC..G

Rechte push-in fitting
buitendraad

Straight screw connection
male thread

Raccordement droit à vis
filetage mâle

Gerade Schraubverbindung
Außengewinde

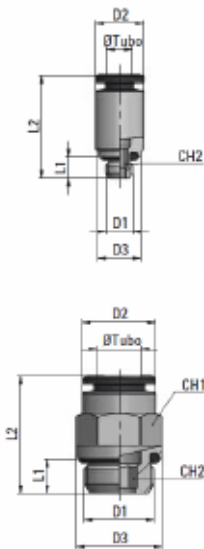

Type	Tubo	D1	D2	L1	L2	CH1	CH2
PC04M5TL	4	M5x0,8	9	4	19	-	2,5
PC06M5TL	6	M5x0,8	12	4	22,7	-	2,
PC04G18TL	4	G1/8	9	5	16,5	9	3
PC06G18TL	6	G1/8	11,9	5	20	12	4
PC06G14TL	6	G1/4	11,9	6,5	20	12	4
PC06G38TL	6	G3/8	11,9	7	21	12	4
PC06G12TL	6	G1/2	11,9	8,5	23	12	4
PC08G18TL	8	G1/8	13,9	5	24	13	6
PC08G14TL	8	G1/4	13,9	6,5	22	14	6
PC08G38TL	8	G3/8	13,9	7	21,5	14	6
PC08G12TL	8	G1/2	13,9	8,5	23,5	14	6
PC10G18TL	10	G1/8	15,9	5	27	15	8
PC10G14TL	10	G1/4	15,9	6,5	27,5	15	8
PC10G38TL	10	G3/8	15,9	7	25	16	8
PC10G12TL	10	G1/2	15,9	8,5	25,5	16	8
PC12G14TL	12	G1/4	18,9	6,5	29	19	8
PC12G38TL	12	G3/8	18,9	7	29	19	8
PC12G12TL	12	G1/2	18,9	8,5	27	19	1